


# PCB-PROTO/PLCC32 TSSOP32 ADAPTER/CODE: STA-FL32

FR4 1.55mm, CU 35um, 2 LAYER, PLATED HOLES, 2 SOLDER MASK, 1 SILK SCREEN  
Top layer PLCC32, 1.27mm pitch, 15 X 12mm body  
Bottom layer TSSOP32, 0.5mm pitch, 20 X 8mm body  
Adapter: Standard 32 X 600 mils dimensions, 1mm holes diameter

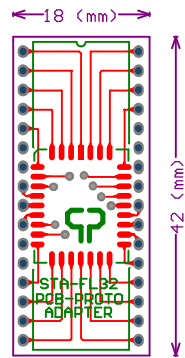

Adapter for FLASH PROM package conversion: DIP32/PLCC32/TSSOP32

# PCB-PROTO\PLCC32 T220P32 ADAPTER\CODE:STA-FL32

FR4 1.5mm, CU 35um, 2 LAYER, PLATED HOLES, 2 SOLDER MASK, 1 SILK SCREEN  
Top layer PLCC32, 1.27mm pitch, 18 X 12mm body  
Bottom layer T220P32, 0.5mm pitch, 20 X 8mm body  
Adapters: Standard 32 X 600 mils dimensions, 1mm holes diameter

Adapter for FLASH PROM package conversion: DIP32\PLCC32\T220P32

